

Star-delta starter

with ETMI electronic controller which manages the entire operation of the machine and system diagnosis.

Spin-on oil and separator filters

The oversized filters ensure long operation intervals and costs reduction.

Pressure transducer

It ensures an optimal and stable operation over the time. It allows to modify the work pressure directly from the electronic controller with no mechanical intervention.

Dryer module

Tank-mounted versions available also with refrigerated dryer (ES).

Ball tap

easier condensation drainage

High performances FS14 air-end

Exclusive design of the air-end, intake regulator and separator block with minimum pressure valve.



★ Highest energy savings

Star-delta starter reduces energy consumption.

★ Easy maintenance


Fast and simple ordinary maintenance thanks to the easy accessibility of internal components.

★ Extremely silent and compact

The centrifugal fan, activated through thermostatic control, ensures proper cooling, maintaining the noise level of the machine low.

★ Plug&Play

The machine is supplied ready to use: plug it to the power supply and to the distribution system to start working with no plant installation difficulties.

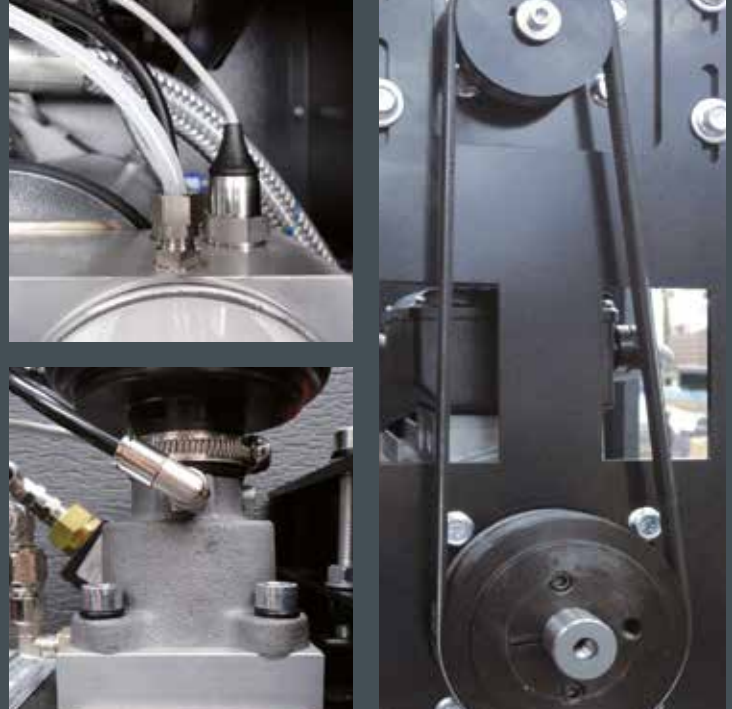

ELECTRONIC

Model	Code	Air receiver ℓ	Power kW	HP	Air outflow rate			Max. pressure		Air-end	Sound level dB(A)	Air outlet G	Net weight kg	Net dimensions LxWxH (mm)	Gross weight kg	Gross dimensions LxWxH (mm)
					l/min.	m³/min.	c.f.m.	bar	p.s.i.							
4 kW																
GIBLI 4.0-08	V51JR92SHA572	-	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	103	580x480x760	114	720x670x970
GIBLI 4.0-10	V51JP92SHA572	-	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	103	580x480x760	114	720x670x970
GIBLI 4.0-13	V51JV92SHA572	-	4	5.5	330	0.33	12	13	189	FS14	60	1/2"	103	580x480x760	114	720x670x970
GIBLI 4.0-08-200	V77JR92SHA572	200	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	153	1480x520x1280	186	1560x660x1430
GIBLI 4.0-10-200	V77JP92SHA572	200	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	153	1480x520x1280	186	1560x660x1430
GIBLI 4.0-08-200 ES	V77JR92SHA672	200	4	5.5	580	0.58	20	8	116	FS14	60	1/2"	175	1480x520x1280	209	1560x660x1430
GIBLI 4.0-10-200 ES	V77JP92SHA672	200	4	5.5	485	0.49	17	10	145	FS14	60	1/2"	175	1480x520x1280	208	1560x660x1430
5.5 kW																
GIBLI 5.5-08	V51JW92SHA572	-	5.5	7.5	720	0.72	25	8	116	FS14	64	1/2"	126	600x520x780	137	720x670x970
GIBLI 5.5-10	V51JO92SHA572	-	5.5	7.5	650	0.65	23	10	145	FS14	64	1/2"	126	600x520x780	137	720x670x970
GIBLI 5.5-13	V51JM92SHA572	-	5.5	7.5	485	0.49	17	13	189	FS14	64	1/2"	126	600x520x780	137	720x670x970
GIBLI 5.5-08-270	V91JW92SHA572	270	5.5	7.5	720	0.72	25	8	116	FS14	64	1/2"	202	1560x570x1390	245	1760x780x1680
GIBLI 5.5-10-270	V91JO92SHA572	270	5.5	7.5	650	0.65	23	10	145	FS14	64	1/2"	202	1560x570x1390	245	1760x780x1680
GIBLI 5.5-08-500	V83JW92SHA572	500	5.5	7.5	720	0.72	25	8	116	FS14	64	1/2"	268	2000x600x1480	308	2070x800x1680
GIBLI 5.5-10-500	V83JO92SHA572	500	5.5	7.5	650	0.65	23	10	145	FS14	64	1/2"	268	2000x600x1480	308	2070x800x1680
GIBLI 5.5-08-270 ES	V91JW92SHA672	270	5.5	7.5	720	0.72	25	8	116	FS14	64	1/2"	229	1560x570x1390	272	1760x780x1680
GIBLI 5.5-10-270 ES	V91JO92SHA672	270	5.5	7.5	650	0.65	23	10	145	FS14	64	1/2"	229	1560x570x1390	272	1760x780x1680
GIBLI 5.5-13-270 ES	V91JM92SHA672	270	5.5	7.5	485	0.49	17	13	189	FS14	64	1/2"	229	1560x570x1390	272	1760x780x1680
GIBLI 5.5-08-500 ES	V83JW92SHA672	500	5.5	7.5	720	0.72	25	8	116	FS14	64	1/2"	304	2000x600x1480	344	2070x800x1680
GIBLI 5.5-10-500 ES	V83JO92SHA672	500	5.5	7.5	650	0.65	23	10	145	FS14	64	1/2"	304	2000x600x1480	344	2070x800x1680

Air flow was measured in the following operative pressures: 8 bar for "08" models - 10 bar for "10" models - 13 bar for "13" models.
The data and results were measured in accordance with standard ISO 1217.
The sound level was measured in accordance with standard ISO 2151, with a tolerance of ± 3 dB(A).



A complete solution

For all 2.2 to 15 kW versions with air receiver and dryer is also possible to retrofit the optional filter kits (1 prefilter and 1 microfilter) to obtain a complete machine, without any additional bulk.

Compressor model	Motor power kW	Air receiver ℓ	Dryer type	Air outflow m ³ /min.	Filters kit code
GIBLI	2.2-5.5	200-270-500	RD17	1.6	#260KFL010
STORM	7.5-11	270	RD17	2.5	#260KFL020
STORM	7.5-11-15	500	RD17-RD24	2.5	#260KFL030