

art. 0E10705

Air operated brake and clutch bleeding device **5 litre**, **without plugs**, complete with two collection tanks (art. 0E10801) and filler funnel.



N° 1 pack.
m³ 0,070

kg 10,2

art. 0E11001

Series of standard connections plugs composed of 5 plugs with thread (A-D-F-I-T), and universal (W).



art. 0E11002


Special connection plugs series (B-C-E-G-H-K-L-M-P-R-U-X-Y-Z).



art. 0E11000/W

Universal plug W with 3 conical plugs


- 1) ø 20 mm
- 2) ø 28 mm
- 3) ø 45 mm

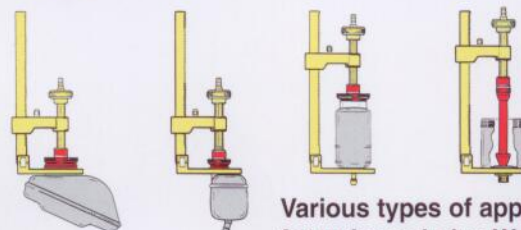

Various types of application for universal plug W

art. 0E10801

Brake fluid recovering device.

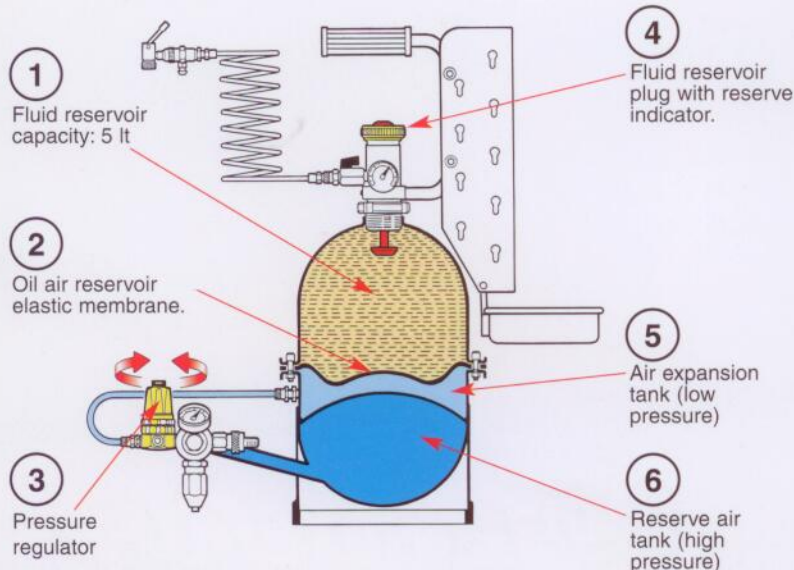

The brake-bleeder device is equipped with an **inner elastic membrane (2)**, which hermetically separates the fluid contained in the **fluid reservoir (1)**, from the air contained in **the expansion air tank (5)**, thus preventing any risk of emulsion.

Furthermore, it is equipped with a third **reserve air tank (high pressure air) (6)** (8-10 bar) which, distributed by means of the **pressure regulator (3)**, enables several bleeding operations to be carried out at a constant pressure, without requiring further recharges.

The fluid reservoir (4) plug is provided with a "fluid reserve indicator" warning when the fluid is finishing.